



ANSI CLASS 250, LUBRICATED PLUG VALVE

GENERAL SPECIFICATIONS:

1. FACE-TO-FACE LENGTHS CONFORM TO ANSI B16.10 FACE-TO-FACE AND END-TO-END DIMENSIONS CLASS 250 CAST IRON PLUG VALVES, VENTURI PATTERN.
2. FLANGES CONFORM TO ANSI B16.1 "CAST IRON PIPE FLANGES AND FLANGE FITTINGS", CLASS 250.
3. FACE-TO-FACE INCLUDES .06" RAISED FACES.
4. FIG 712G VALVES HAVE GEARS SIZED FOR APPLICATIONS UP TO 250 PSI.
5. FOR FLAMMABLE FLUID OR GAS APPLICATIONS, THE MAXIMUM OPERATING PRESSURE IS 125 PSI.

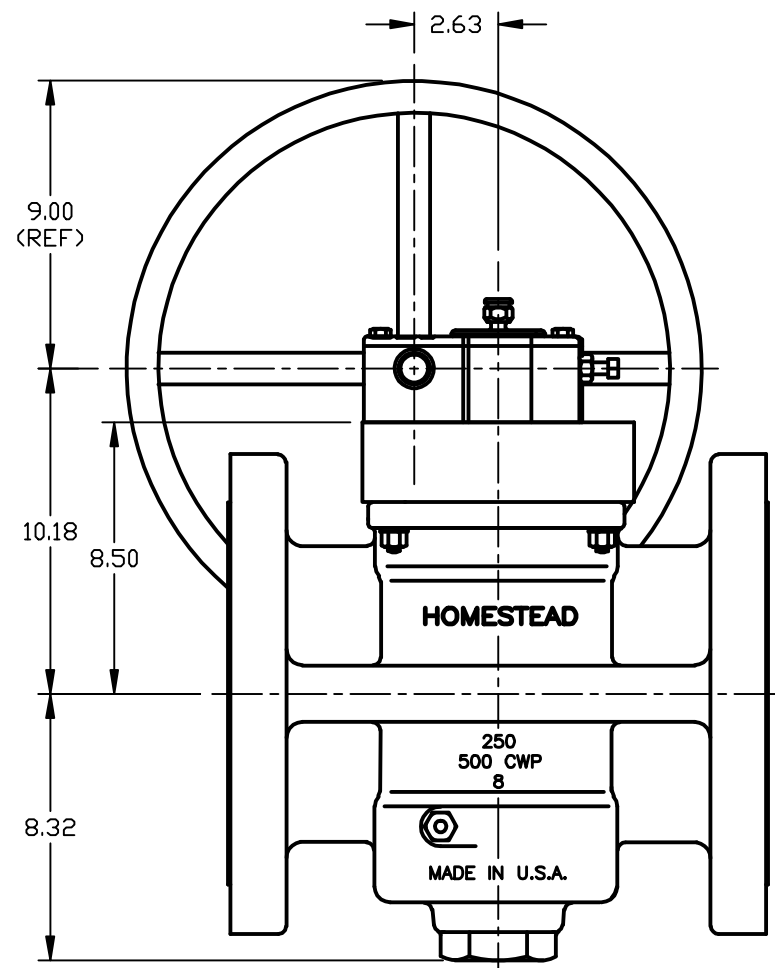

1.62 (TYP)
(SEE NOTE 3)

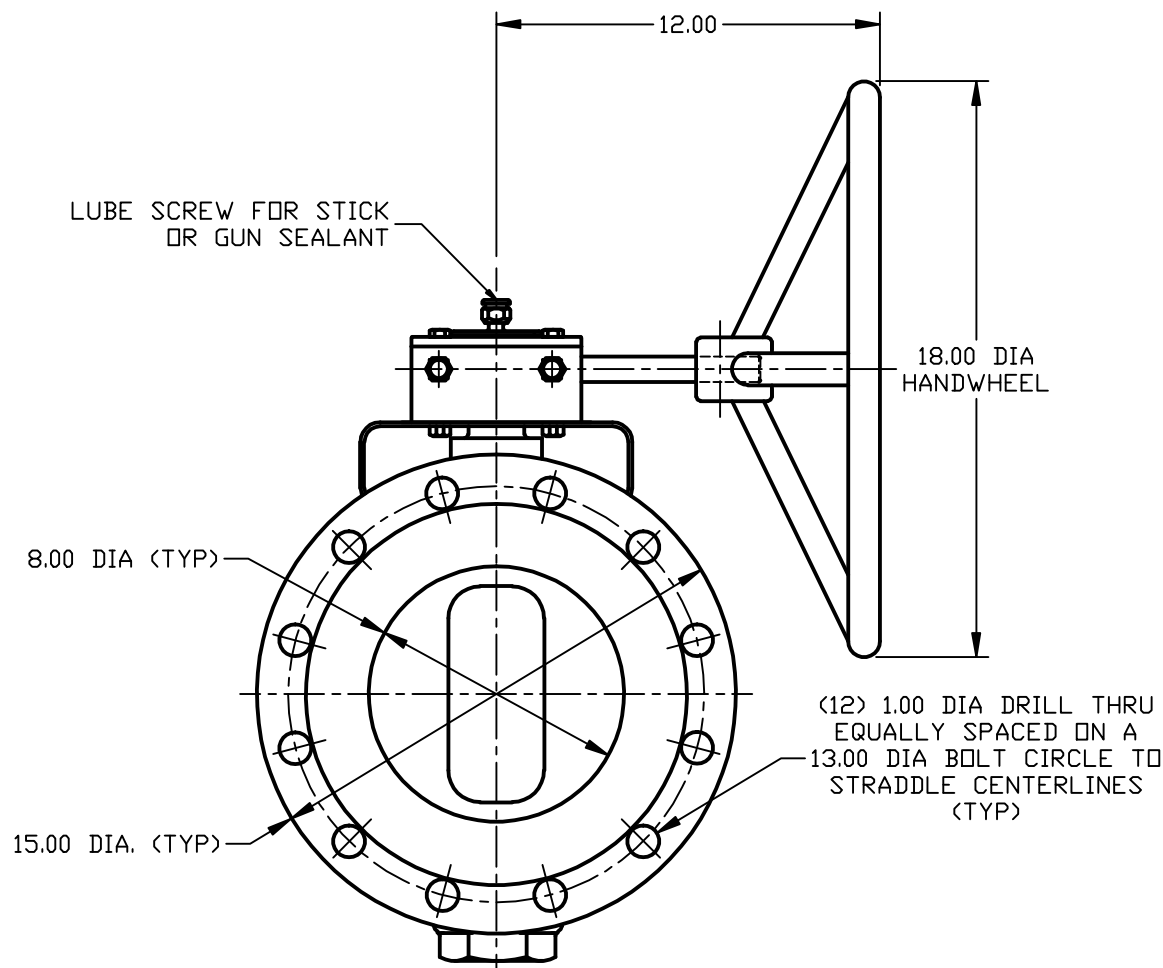

21	GEAR w/HANDWHEEL	COMMERCIAL
20	KEY	STEEL
19	CAP SCREW	STEEL, ZINC PLATED
18	MOUNTING BRACKET	STEEL
17	HEX NUT	STEEL
16	LOCK WASHER	STEEL
15	CAP SCREW	STEEL, ZINC PLATED
14	LUBE FITTING	STEEL
13	LUBE SCREW	STEEL
12	COUPLING	STEEL
11	PIPE NIPPLE	STEEL
10	SEALANT	AS REQUIRED
9	CHECK VALVE	STEEL
8	O-RING	VITON
7	HEAD SEAL	PTFE
6	DISC	PTFE
5	DISC	STEEL
4	SPRING	STEEL
3	BONNET	A536 65-45-12
2	PLUG	A126 CL B
1	BODY	A536 65-45-12
NO.	PART NAME	MATERIAL

PARTS LIST

HOMESTEAD VALVES
A DIVISION OF OLSON TECHNOLOGIES, INC.
160 WALNUT ST. ALLENTOWN, PA. 18102 (610) 770-1100

				TITLE	
C	S2067	ND	9/21/21	8" FIG 712G ASSEMBLY LUBRICATED PLUG VALVE	
B	R296	HCS TRS	5/98		
A	R200	HCS TRS	8/97		
REV	ISSUE	BY	APPR	DATE	NUMBER
					SK-2008