



GENERAL SPECIFICATIONS:

- 1. MANUFACTURED IN ACCORDANCE WITH AWWA C504, CLASS 150B, LATEST REVISION.
- 2. FLANGES CONFORM TO AWWA C111/A21.11 MECHANICAL JOINT, LATEST REVISION.
- 3. BODY AND DISC TO BE COATED WITH 'SCOTCHKOTE' 206 FUSION-BONDED EPOXY.

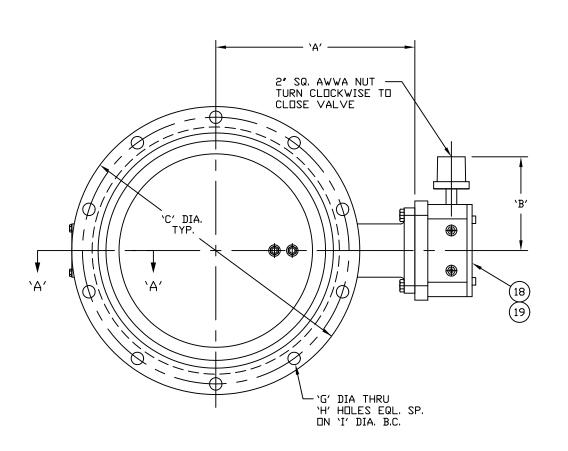

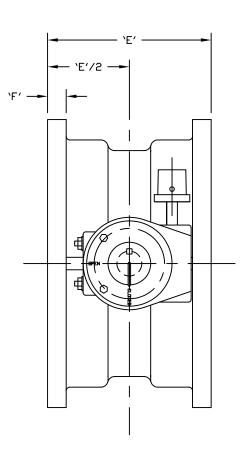

19	SCREW	CARBON STEEL		
18	ACTUAT□R	MANUAL		
17	KEY	CARBON STEEL		
16	SEAT	NBR (EPDM-OPTIONAL)		
15	NUT	304 STAINLESS STEEL		
14	WASHER	304 STAINLESS STEEL		
13	PIN	304 STAINLESS STEEL		
12	SCREW	CARBON STL. ZINC PL.		
11	BOTTOM CO∨ER	CARBON STEEL		
10	WASHER	304 STAINLESS STEEL		
9	PACKING	NBR (EPDM-OPTIONAL)		
8	LOWER BEARING	NYLON		
7	RETAINING SPRING	CARBON STEEL		
6	WASHER	304 STAINLESS STEEL		
5	PACKING	NBR (EPDM-OPTIONAL)		
4	UPPER BEARING	NYLON		
3	SHAFT	316 STAINLESS STEEL		
2	DISC/EDGE	A536 65-45-12/316SS		
1	BODY	A536 65-45-12		
ND.	PART NAME	MATERIAL		
DADTO LICT				

PARTS LIST

HOMESTEAD® VALVES
A DIVISION OF OLSON TECHNOLOGIES, INC.
160 WALNUT ST. ALLENTOWN, PA. 18102 (610) 770-1100

					TITLE 3"-14" SERIES 821
					M.J. BFV ASSY. W/MANUAL
В	\$1308	RH		2/18/11	ACTUATOR & 2 " NUT
Α	2900	TC	DED	03/21/07	NUMBER SK-5006
REV	ISSUE	ΒY	APPR	DATE	2K-2006

This drawing and its design are the property of OLSON TECHNOLOGIES. This drawing is loaned to you subject to the condition that it shall not be reproduced, copied, lent or otherwise disposed of, directly or indirectly. It shall not be used to furnish any information for the naking of drawings, prints, or apparatus, or parts thereof, except where otherwise specifically provided for by contract agreement with OLSON TECHNOLOGIES.